



Miedz

Pierwsze kroki to wpisanie w przeglądarce adresu 192.168.1.254

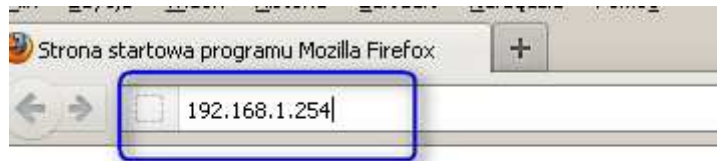

Wpisujemy nazwę użytkownika oraz hasło: admin:

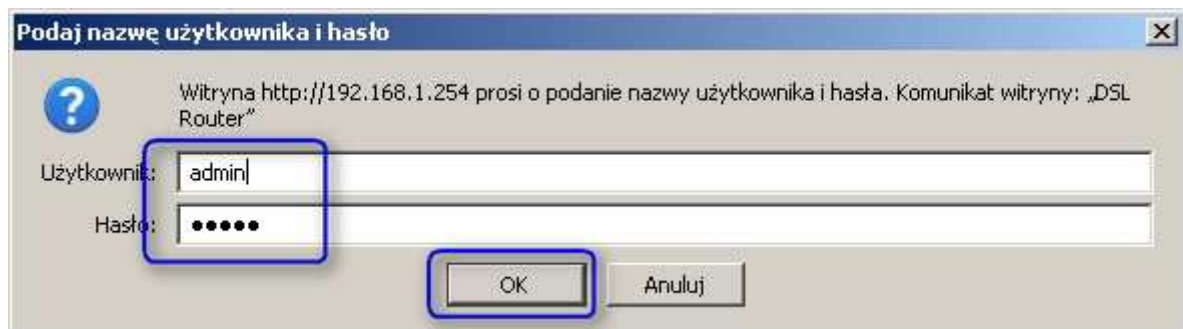

Po zalogowaniu przechodzimy do zakładki Advanced Setup i klikamy na WAN



Klikamy Edit

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

Port/Vpi/Vci	VLAN Mux	Con. ID	Category	Service	Interface	Protocol	Igmp	QoS	State	Remove	Edit
0/0/35	Off	1	UBR	pppoa_0_0_35_2	ppp_0_0_35_1	PPPoA	Disabled	Disabled	Enabled	<input type="checkbox"/>	Edit
0/8/35	Off	1	UBR	pppoe_0_8_35_2	ppp_0_8_35_1	PPPoE	Disabled	Disabled	Enabled	<input type="checkbox"/>	Edit

Add Remove Save/Reboot

Nic nie zmieniamy, Klikamy NEXT

ATM PVC Configuration

This screen allows you to configure an ATM PVC identifier (PORT and VPI and VCI) and select a service category to enable it.

VPI: [0-255]

VCI: [32-65535]

VLAN Mux - Enable Multiple Protocols Over a Single PVC

Service Category:

Enable Quality Of Service

Enabling packet level QoS for a PVC improves performance for selected classes of applications. QoS cannot be enabled if the number of PVCs will be reduced. Use **Advanced Setup/Quality of Service** to assign priorities for the

Enable Quality Of Service

Back

Nic nie zmieniamy, Klikamy NEXT

Connection Type

Select the type of network protocol and encapsulation mode over the ATM PVC that your ISP has instructed you to use.

- PPP over ATM (PPPoA)
- PPP over Ethernet (PPPoE)
- MAC Encapsulation Routing (MER)
- IP over ATM (IPoA)
- Bridging

Encapsulation Mode

Back

Wpisujemy indywidualną nazwę użytkownika oraz hasło

PPP Username and Password

PPP usually requires that you have a user name and password to establish your connection. In the boxes bel

PPP Username: **Indywidualna nazwa i hasło**

PPP Password:

Authentication Method:

MTU[1-65535]:

Enable Fullcone NAT


Dial on demand (with idle timeout timer)

PPP IP extension

Use Static IP Address

Retry PPP password on authentication error

Enable PPP Debug Mode

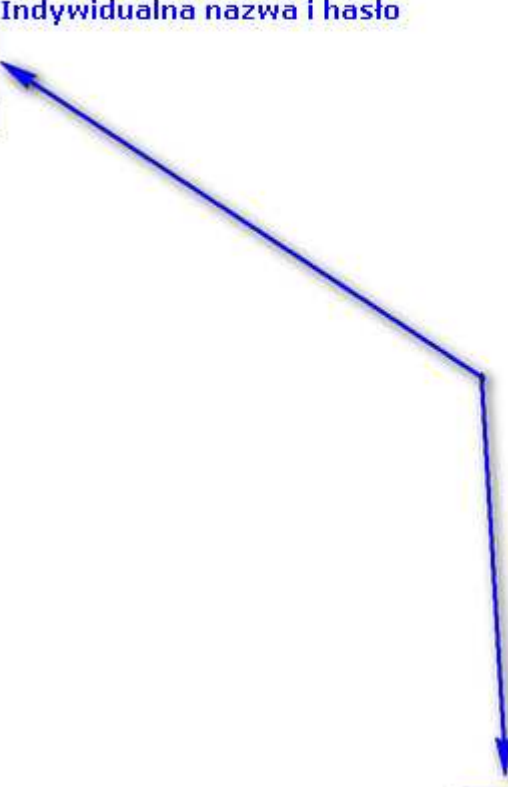

Nic nie zmieniamy, Klikamy NEXT

Enable IGMP Multicast, and WAN Service

Enable IGMP Multicast

Enable WAN Service

Service Name



Nic nie zmieniamy, Klikamy SAVE

WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP.

PORT / VPI / VCI:	0 / 8 / 35
Connection Type:	PPPoE
Service Name:	pppoe_0_8_35_2
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Enabled
IGMP Multicast:	Disabled
Quality Of Service:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.
NOTE: You need to reboot to activate this WAN interface and further configure services over this interface.

Nic nie zmieniamy, Klikamy SAVE/Reboot

Wide Area Network (WAN) Setup

Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

Port/Vpi/Vci	VLAN Mux	Con. ID	Category	Service	Interface	Protocol	Igmp	QoS	State	Remove	Edit
0/0/35	Off	1	UBR	pppoa_0_0_35_2	ppp_0_0_35_1	PPPoA	Disabled	Disabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>
0/8/35	Off	1	UBR	pppoe_0_8_35_2	ppp_0_8_35_1	PPPoE	Disabled	Disabled	Enabled	<input type="checkbox"/>	<input type="button" value="Edit"/>

Modem wyłączy się i włączy ponownie, po chwili komputery będą miały dostęp do internetu.