


Aby ponownie skonfigurować router Technicolor TG589vn należy:

- a. Otworzyć przeglądarkę internetową poprzez wybranie odpowiedniej ikony dwukrotnym naciśnięciem lewego klawisza myszy (np. Internet Explorer lub Mozilla Firefox):




- b. W przeglądarce internetowej w pasku adresu na górze strony należy wprowadzić następujący adres strony konfiguracyjnej routera zatwierdzając klawiszem Enter:

192.168.1.254

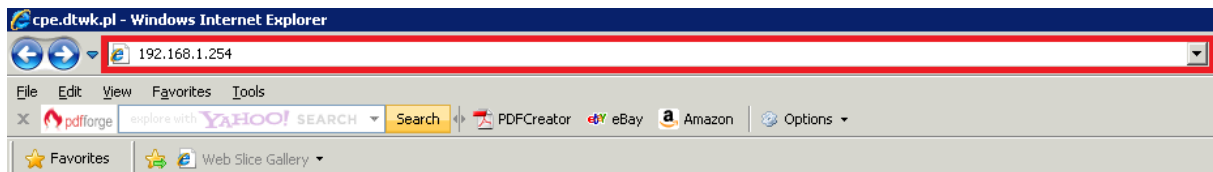

- c. Po pojawieniu się ekranu logowania należy wpisać „**admin**” jako nazwę użytkownika oraz „**admin**” jako hasło a następnie wcisnąć „**OK**”:

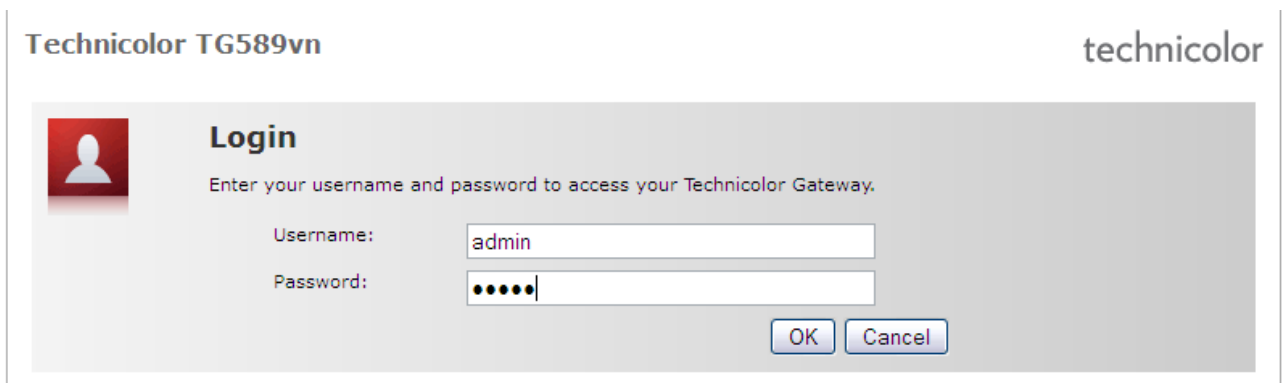

- d. Po zalogowaniu się na ekran konfiguracyjny routera należy nacisnąć na napis „**Internet**” w sekcji „**Broadband Connection**”:

The screenshot shows the Technicolor Gateway web interface. On the left is a navigation menu with 'Home', 'Technicolor Gateway', 'Broadband Connection', 'Toolbox', 'Home Network', and 'Help'. The main content area is titled 'Technicolor Gateway' and includes a sub-section 'Broadband Connection'. Under 'Broadband Connection', there is a list of services: 'Internet' (Connected), 'InternetGE' (Disconnected), 'IPTV_GE' (Disconnected), and 'IPTV_VDSL' (Connected). A blue arrow points from the 'Internet' link to the 'Disconnect' button.

- e. Na kolejnym ekranie należy wpisać nazwę użytkownika i hasło. Aby to zrobić najpierw trzeba kliknąć „Disconnect” a następnie wprowadzić swój login oraz hasło i kliknąć „Connect”:

This screenshot shows the 'Internet' connection information page. The left navigation menu is expanded to show 'Internet Services'. The main content area displays connection details: Uptime (0 days, 0:32:20), Data Transferred (86,41 / 6,71 MB/MB), Username (redacted), Password (redacted), Remember Password (Yes), IP Address (77.253.147.42), Primary DNS (62.233.233.233), and Secondary DNS (87.204.204.204). A blue arrow points to the 'Disconnect' button in the top right corner.

This screenshot shows the 'Internet' connection information page after clicking 'Disconnect'. The 'Link Status' is now 'Disconnected' with the error message 'Concentrator not reachable'. The 'Username' field is filled with 'netia@netia.pl' and the password field contains masked characters. A blue arrow points to the 'Connect' button in the top right corner.

Połączenie w ciągu kilkunastu sekund zostanie nawiązane.